


Blindflenzen

Blindflens, type 05 boring volgens EN1092-1
Materiaal S235JR met 3.1 certificaat volgens EN 10204

d1 = Buismaat
D = Uitwendige diam
b = Flensdikte
K = Steekcirkel
d2 = Gat

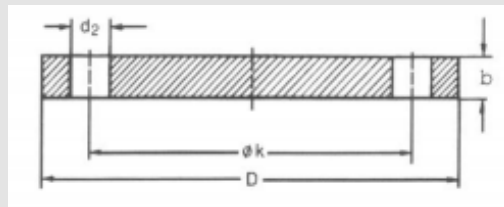

PN	NW	d1	D	b	k	gaten	d2	theor.gew.
		(mm)	(mm)	(mm)	(mm)	stuks	(mm)	kg./st.
PN10 t/m PN40	15	21,3	95	12	65	4	14	0,72
	20	26,9	105	14	75	4	14	1,00
	25	33,7	115	14	85	4	14	1,23
	32	42,4	140	14	100	4	18	1,60
	40	48,3	150	14	110	4	18	1,80
	50	60,3	165	16	125	4	18	2,60
PN10 t/m PN16	65	76,1	185	16	145	4	18	3,20
	80	88,9	200	18	160	4	18	4,30
	80	88,9	200	20	160	8	18	4,30
	100	114,3	220	18	180	8	18	5,00
	125	139,7	250	20	210	8	18	7,50
	150	168,3	285	20	240	8	22	9,10
PN10	200	219,1	340	22	295	8	22	17,00
	200	219,1	340	22	295	12	22	17,00
	250	273,0	395	24	350	12	22	23,00
	300	323,9	445	24	400	12	22	28,00
	350	355,6	505	24	460	16	22	40,00
	400	406,4	565	26	515	16	26	49,40
	450	457,0	615	26	565	20	26	67,40
	500	508,0	670	26	620	20	26	67,40
	600	610,0	780	28	725	20	30	103,00
	700	711,0	895	30	840	24	30	135,00
800	813,0	1015	32	950	24	33	200,00	

www.heusstaal.nl

Wij aanvaarden geen enkele aansprakelijkheid voor eventuele redactie en/of drukfouten.